



SIEMENS

Ingenuity for life

Setting the standard with measuring systems

Process instrumentation, process analytics,
weighing technology – Your One-Stop Shop

[siemens.com/processautomation](https://www.siemens.com/processautomation)



How to optimize processes with our automation and instrumentation portfolio

High-quality processes are crucial in the process industry. Only then do you get the required results. And it is only then that plants work efficiently and therefore productively.

Process instrumentation and analytics as well as weighing technology all play a crucial role here. They measure, analyze, regulate, and control industrial processes and thus contribute to increasing the efficiency of process plants and improving their product quality.

Benefit from the versatility of our holistic solutions for your process tasks – with integrated solutions from a single source. Benefit from the openness of the systems. And from constant innovation and comprehensive services.



Process Instrumentation



Weighing Technology



Process Analytics



Digitalization



Services

Process Instrumentation	04
Pressure Measurement	06
Temperature Measurement	10
Flow Measurement	14
Level Measurement	20
Positioners	26
Process Monitoring	28
Additional Components	30
Weighing Technology	32
Electronic Weighing Systems	34
Load Cells, Weighing Terminals, and Dynamic Weighing Systems	36
Process Analytics	38
Continuous Gas Analyzers – Extractive	40
Continuous Gas Analyzers – In Situ	44
Process Gas Chromatographs	46
Analytical Application Sets	48
Solution Concepts	50
Software	52
Digitalization	54
SIOS	56
COMOS	57
SITRANS IQ	58
NAMUR	59
Services	60
Industry Services	61
Remote Services	62
Partners	63



PDF file



Mall industry



YouTube



Link to webpage





In the areas of process instrumentation and process analytics as well as weighing and dosing systems, our main focus is on the process industries, such as the chemicals, oil and gas and hydrocarbon processing, water and wastewater, pharmaceuticals, mining, aggregates, cement, pulp and paper, food and beverage, and shipbuilding industries.



How to increase process efficiency and product quality

In field instrumentation, maximum precision and absolutely reliable measurement results are key. Only then can you increase the efficiency of your process plants and improve their product quality. Whether you're dealing with pressure, temperature, flow, or level, we offer you a globally unique range of transmitters for field instrumentation. Our comprehensive portfolio also includes weighing and batching systems, pneumatic valve positioners, process controllers, and process recorders.








Pressure measurement without any “ifs” and “buts”: SITRANS P

SITRANS P is a complete range of measurement instruments for measuring relative pressure, differential pressure, and absolute pressure. In addition to high measuring accuracy and ruggedness, the modular system features superb operating convenience and functionality as well as a perfect safety concept.



SITRANS P320/420 – the first pressure transmitter for remote commissioning of functional safety

- Time and effort savings due to remote commissioning of SIL devices
- Developed in accordance with the IEC 61508 standard for use in SIL 2/3
- Reduced response time increases process efficiency by speeding up the control system's response to changing process conditions
- Ready for plant digitalization with the HART 7 pressure transmitter: data logging functions and event control deliver users in-depth control and analysis
- User-friendly display due to clear display and diagnostic icons in accordance with NAMUR NE107
- Maintenance cost reduction due to proof test interval up to 10 years
- The transmitter is FM-approved

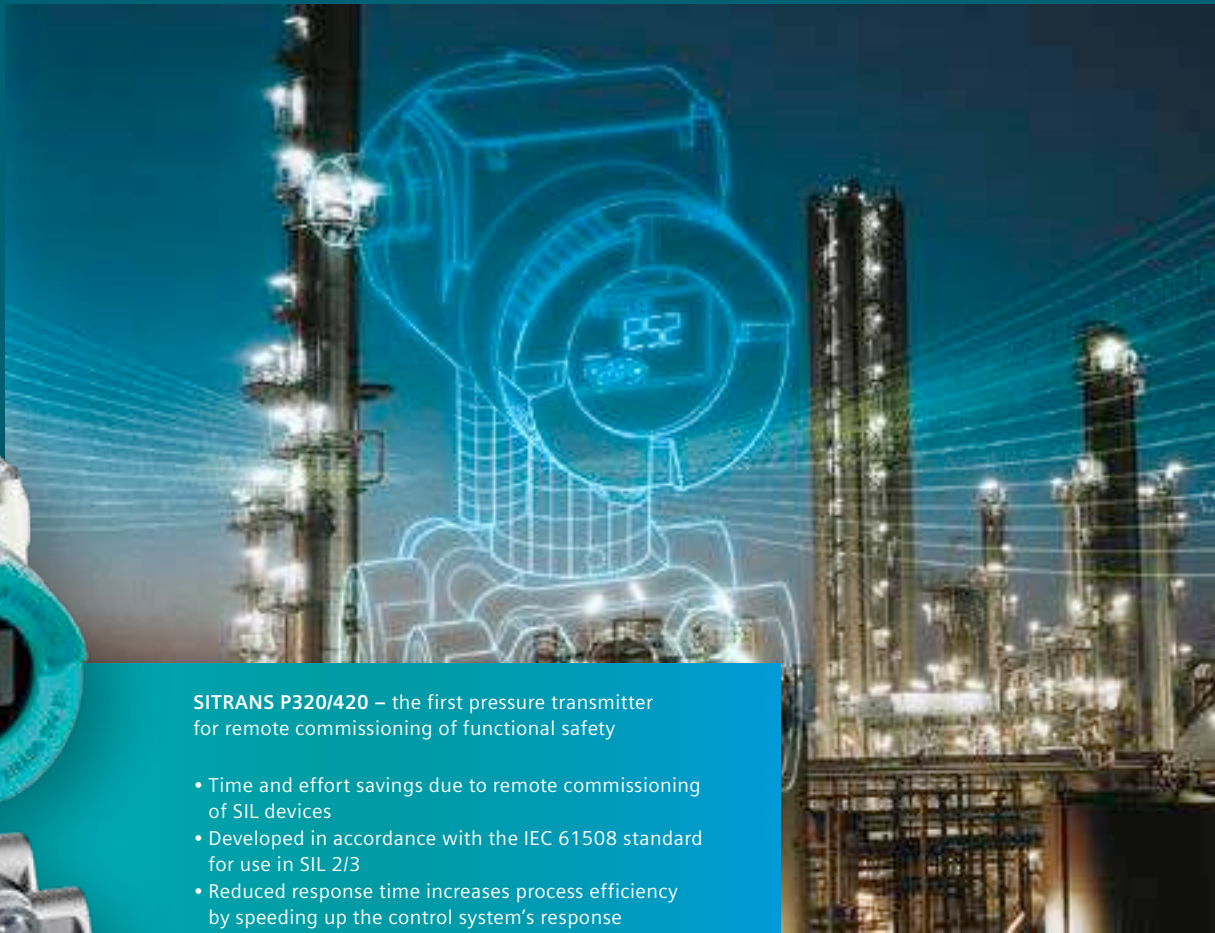



SITRANS P500

- Deviations from the characteristic curve of less than 0.03% of the calibrated measuring range for different pressure and level requirements
- Design of the measuring cells allows for use with media temperatures of up to 125 °C even without the use of a remote seal system
- Fast step response time (T63) of only 88 ms ensures plant safety in critical applications
- Graphics-enabled display shows curve and trend diagrams for goal-oriented process monitoring





SITRANS LH100/LH300

- Suitable for applications ranging from drinking water or wastewater to corrosive liquids thanks to stainless steel enclosure
- Rugged submersible sensors for hydrostatic level measurement
- Installation possible in pipes with 1" inner diameter



SITRANS P200/210/220

- Single-range transmitter for relative, absolute, and hydrostatic pressure
- Pressure sensors: Stainless steel sensors (SITRANS P210 and SITRANS P220) as well as sensors with ceramic membrane (SITRANS P200)
- Conversion of measured pressure into either 4–20 mA or 0–10 V signal



SITRANS P compact

- Analog transmitter for absolute and relative pressure
- Hygienic design in accordance with EHEDG, FDA, and GMP recommendations
- Stainless steel process connections and enclosure
- Measurement deviation $\leq 0.2\%$





SITRANS P300

- More than 90 different process connection variants offer the highest degree of flexibility
- Versatile communication connection via HART protocol, PROFIBUS PA, or FOUNDATION Fieldbus
- Fulfills EHEDG, FDA, and 3A requirements
- Maximum measurement deviation of 0.075%
- Can be combined with flush-mounted absolute or relative pressure measuring cells





Because every degree matters: SITRANS T

SITRANS T products are the temperature measurement professionals, even in extreme conditions. Whether used in hot, cold, or hazardous environments – the communicative SITRANS T meets all expectations. And whether you're looking for sensors or transmitters for head, rail, or field mounting – all are available individually or as complete measuring points. Our cost-effective SITRANS T transmitters offer high precision in every application and are quick and easy to connect to thermocouples or resistance thermometers. The SIMATIC PDM intelligent software package permits parameterization in just minutes, and input errors are avoided.



SITRANS TS500 – temperature sensors for pipes and vessels – from simple applications to solutions for harsh environments

- Modular system with thermowell made of tubular or barstock material, extension, connection head, and optional transmitter or display
- Version for intrinsic safety, flameproof, and nonsparking are available





Transmitters for head mounting



SITRANS TH100

- Pt100 single input transmitter
- Diagnostics LED
- Supports four-wire Pt100
- 4–20 mA
- Low-cost and compact



SITRANS TH420

- Universal dual input transmitter
- Hot backup function
- Diagnostics LED
- Supports two four-wire RTD/TC/mV and resistances
- Supports Callendar-van-Dusen
- HART 7 + SIL 2/3 (IEC 61508)
- Interface for local HMI

SITRANS TH400

- Fieldbus transmitter
- For PROFIBUS PA or FOUNDATION Fieldbus
- Configurable with SIMATIC PDM (PA) or AMS (FF)
- Extensive diagnostics and simulation functions
- Transmission of important device and process data via the bus cable



SITRANS TH320

- Universal single input transmitter
- Diagnostics LED
- Supports four-wire RTD/TC/mV and resistances
- Supports Callendar-van-Dusen
- HART 7 + SIL 2/3 (IEC 61508)
- 4–20 mA
- Interface for local HMI



Transmitters for rail mounting



SITRANS TR320

- Universal and single input transmitter
- Diagnostics LED
- Supports four-wire RTD/TC/mV and resistances
- Supports Callendar-van-Dusen
- HART 7 + SIL 2/3 (IEC 61508)
- 4–20 mA



SITRANS TR420

- Universal dual input transmitter
- Hot backup function
- Diagnostics LED
- Supports two four-wire RTD/TC/mV and resistances
- Supports Callendar-van-Dusen
- HART 7 + SIL 2/3 (IEC 61508)





SITRANS TS temperature sensors

Transmitters for field installation



SITRANS TF with TH400

- IP66/67/68 degree of protection
- Used where there is excessive heat or vibration at the measuring point
- PA/FF communication



SITRANS TF320/420

- Stainless steel or aluminum enclosure
- Temperature field transmitter for multiple applications
- Configurable via local display
- Full redundancy via hot backup function (TF420)
- SIL 2/3 certified
- HART 7
- 4–20mA
- Combined types of protection available, e.g., Ex d + Ex i



SITRANS TS100

- For multiple applications
- Supplied with directly installed cable
- ATEX and IEC EX approvals; can be operated in Zone 0
- Wide range of options thanks to modular principle



SITRANS TS300

- Clamp-on temperature sensor
- Design meets EHEDG recommendations and is therefore suitable for use in the food and beverage and pharmaceutical industries
- Replaceable measuring inserts



SITRANS TS200 compact design

- For multiple applications
- Compact design with directly installed fixed connection (M12, Lemo, etc.)
- ATEX and IEC EX approvals; can be operated in Zone 0
- Wide range of options thanks to modular principle



SITRANS TS Thermowell

- Wide range of lengths and materials
- Comprehensive coverage of applications
- Customer-specific options are possible
- High stability by high-quality materials
- Comprehensive material and quality controls available





Transmitters for fiber-optic temperature measurement



SITRANS TO500

- Fiber-optic temperature transmitter
- Diameter of sensor measuring probe < 2 mm
- Up to 48 measuring points per sensor measuring probe
- Simple and low-cost installation thanks to rolled sensor measuring probe





Everything flows: SITRANS F

Whether measuring gases, liquids, or steam – choosing the right flowmeter is decisive for productivity. This is where the SITRANS F line comes in. Our portfolio contains the fitting flowmeter for every application and medium, with five different flow technologies available to suit a wide range of operating conditions: Coriolis, electromagnetic, ultrasonic, vortex, and differential pressure.



Transmitter SITRANS FCT070 Coriolis flowmeter solution

- Full control and parameterization via the control system
- Direct integration into SIMATIC S7, TIA Portal and PCS 7
- Coriolis technology modul for ET 200SP
- Selection via TIA Selector (secures easy integration in SIMATIC)
- Fast digital signal to sensor with 10 ms update rate
- Full advanced transmitter functionality via automation control
- Over PROFINET, the measure data are transmitted to the automation in real time
- Full hazardous area solutions with use of SITRANS I300 barrier
- Advanced batch control integrated
- Advanced fraction measurements
- Integration function blocs available for all Siemens automation systems





FCT030 advanced full range transmitter

- Available as compact, remote field-mount and remote wall mounting enclosures
- Multi 4 I/O channels, freely configurable and programmable
- Full package of communication: HART, PROFIBUS PA and DP; Modbus
- Advanced large size graphical display including trend curve and multilevel display views
- Integrated data logger, ideal for diagnostics on advanced applications
- Advanced diagnostic functionality
- Build in programmable settings for optimizing pulsating flow and aerated flow
- Integrated 16+ unique fractions tables for concentration measurements
- Build-in-batch controller for two-stage batch applications



SITRANS FCS300

Innovative and user-friendly transmitters FCT030, FCT010, or FCT070 with audit trails, trend curves, data logger, and advanced diagnostic functionalities

- Dual splitflow design in sizes from DN 15 to DN 150 in different versions, wetted material in AISI 316 as well as nickel alloy
- Remote- or compact-mounted
- Available with broad range of transmitter FCT030, FCT010, and FCT070
- Solid performance with mass flow accuracy of 0.1% or 0.2% and density accuracy of down to 2 kg/m³
- Robust frame and housing isolates from external vibrations, creating an ideal measurement in difficult environment
- Ideal for the chemical, petrochemical and oil and gas industry



SITRANS FC

Coriolis mass flowmeters SITRANS FC multivariable devices measure the direct mass flow rate of liquids and gases in almost any application. They deliver reliable and repeatable information on mass flow, volume flow, temperature, density, and concentration (e.g., Brix or Plato).

They are available in sensor sizes DN 1.5 to 150 mm with different flowmeter transmitter versions to fulfill requirements for high performance in oil and gas, chemicals, food and beverage, pharmaceuticals, and automotive applications.

Full range of digital transmitters

The uniform sensor and transmitter platform offers solutions for sizes from Di 1.5 to DN 150 mm with three different transmitters



FCT010 single digital channel transmitter

- Full multiparameter Modbus output ideal for PLC integration
- Robust aluminum housing mounted directly on the different sensors, for most sensor sizes
- Small in size, ideal for skids and compact machines
- Full performance in a cost-efficient solution



SITRANS FCS low flow

Single tube in sizes from DI 1.5 to DI 15, with a wide selection of available connections

- High-performance accuracy: 0.1% on massflow and down to 0.5 kg/m³ density
- Available with broad range of transmitter FCT030, FCT010, and FCT070
- DN 4 design withstands pressure rates up to 1000 bar
- Ideal for a broad range of low-flow applications within the automotive, chemicals, and food and beverage industries
- Easy installation using a plug and play interface
- Optimal hygiene, safety, and CIP cleanability for the food and beverage industry as well as pharmaceutical applications, thanks to single-tube construction without internal welds, reductions, or flow splitters



SITRANS FCS400

- Dual splitflow design in sizes DN 15 to DN 50
- Market's most compact design
- Available with all common process connections including a variety of sanitary common connections
- Available with broad range of transmitter FCT030, FCT010, and FCT070
- High-performance accuracy: 0.1% on massflow and down to 0.5 kg/m³ density
- Ideal for OEM, skids, machine builder, marine and sanitary applications





SITRANS F M

electromagnetic flowmeters

The task of an electromagnetic flowmeter from the SITRANS F M product family is to measure flow volume of electrically conducting fluids such as water, chemicals, food and beverage, slurries, sludge, paper stock, and mining slurries with magnetic particles.



Modular pulsed DC meters:

SITRANS F M MAG (DN 2 to DN 2200)

- Full transmitter program includes MAG 5000/MAG 6000/MAG 6000 I; compact- or remote-mounted
- Multiple I/O as standard and communication modules PROFIBUS PA/DP
- DeviceNet, FOUNDATION Fieldbus, HART, and Modbus RTU are available
- MAG 5100 W sensor for water and wastewater applications
- MAG 3100 P sensor for process industries and the harsh requirements in the chemical industry
- MAG 3100 P as quick ship variant available
- MAG 3100/MAG 3100 HT sensor for general process industries
- MAG 1100/1100 HT sensor for general process industries
- MAG 1100 F sensor for food and beverage and pharmaceutical industries



Battery-operated water meters:

MAG 8000/MAG 8000 CT (DN 25 to DN 1200)

- Battery lifetime up to 15 years*
- IP68 (NEMA 6P) enclosure and sensor painting in accordance with ISO 12944 class C4M corrosivity for burial and submerged applications
- Easy installation without straight inlet/outlet
- Rich add-on communication modules: Modbus RTU, encoder card, 3G/UMTS module



MAG 8000 with 3G/UMTS module

- Rich data transmission protocols supported by 3G module: SMS, secured e-mail, and secured FTP
- Built-in Remote Qualification Certificate enables comprehensive device diagnostics and off-site audits
- Configurable analog input for external ratiometric pressure transmitter in parallel with flow measurement (2-in-1 solution), or 4–20 mA alarm signal input for external tamper and flooding detector
- MAG 8000 clock synchronization with Internet NTP server featuring
- Adjustable time zone setting ensures measurement data is always accurately time-stamped
- Single SMS synchronizes the data transmission time for all MAG 8000 devices in field
- Real-time SMS notification for MAG 8000 alarms



*for 4 D-cell external battery pack



High-powered AC meters:

TRANSMAG 2 / (DN 15 to DN 1000)

- Specially designed for heavy mining slurries with or without magnetic particles as well
- Also suitable for the most difficult applications in the pulp and paper industry
- Low conductive medias $\geq 1 \mu\text{S/cm}$ ($0.1 \mu\text{S/cm}$ depending on medium)
- No movable parts
- Stable zero point/pulsed alternating field for accurate flow signal and excellent signal strength
- SmartPLUG concept
- Comprehensive self-diagnostics



Threaded SITRANS FM100:

Making engineering and design even simpler

- Measuring and monitoring small and medium flows. Robust stainless steel design (threaded: 1/2", 3/4", 1", 2")
- Generation of two process values, simultaneous flow and temperature measurement
- Dosing function with external control input
- Four optical buttons, easy local operation in the field with gloves possible
- The display can be electronically rotated in 90° steps
- Bidirectional measurement
- Integration in many standard applications possible, as there are two individually configurable outputs (pulse/frequency/ alarm and analog output)
- Total and partial volume counters to track flow rates
- IO-Link communication available





SITRANS F S inline ultrasonic flowmeters

Our ultrasonic flowmeters deliver extremely accurate results for a wide range of conductivities, viscosities, temperatures, densities, and pressures. This makes them an optimal choice for measuring homogenous conductive and non-conductive liquids within a wide variety of process industry applications.



SITRANS F S SONO 3100/SONO 3300

- Suitable for water applications in sizes DN 50 to DN 500
- Available as 1- or 2-path systems in combination with SITRANS FUS060 transmitter
- Option between mild steel and stainless steel on request
- Sensors can be exchanged without interrupting operation



SITRANS F S SONOKIT

- The SONOKIT system is designed for inline retrofitting on existing water pipelines up to DN 1200 as a 1- or 2-track flowmeter
- For use with the dedicated SITRANS FUS060 transmitter (up to DN 500) or battery-powered FUS080 transmitter (up to DN 1200)
- The unique design enables installation on empty pipes or pipes under pressure without process shutdown
- Robust version can be buried and withstands constant flooding
- Outstanding accuracy; the bigger the pipe, the more accurate the result



SITRANS FUS380 and FUE380

- For the utility industry, the 2-track FUS380 and FUE380 are designed to measure water flow in district heating plants, local networks, boiler stations, substations, and other general water applications
- Also suitable for chiller plants (including glycol mixes without type approval)
- Custody transfer approvals for district heating custody transfer applications (MID MI-004). Sizes range from DN 50 to DN 1200
- Battery or mains power enables installation where needed. Battery lifetime up to 6 years
- Ideal for energy metering together with the SITRANS FUE950 energy calculator
- With heatmeter type approval (MID MI-004)





SITRANS F S clamp-on ultrasonic flowmeters

The externally mounted sensors of SITRANS F S clamp-on ultrasonic flowmeters are quickly and easily installed on the outside of a pipe, making them the perfect choice for existing applications or where corrosive, toxic, or high-pressure fluids rule out the option of cutting the pipe. The cost-efficient technology provides highly accurate measurement of liquids in pipes ranging from DN 6 to DN 10000 in size.



SITRANS FS230

- Digitally based system featuring market-leading accuracy of 0.5% to 1% of flow rate
- Best-in-class 100 Hz data update rate reliably detects even the smallest changes in flow
- WideBeam® transit-time technology allows for measurement of virtually any liquid, even those with high levels of aeration or suspended solids
- Large graphical display with intuitive navigation, multiple setup wizards and patented pipe configuration menu
- SensorFlash® microSD card stores all operational data for easy device transfer and servicing
- Application examples include raw and potable water, effluent, district heating and cooling, hydroelectricity, and nuclear feed water



SITRANS FS220

- Cost-efficient system offering the most commonly required measurement functions
- Consistently high accuracy of 1% of flow rate and 0.25% repeatability in accordance with ISO 11631
- Enhanced zero stability results in minimal need to set a zero point
- WideBeam® transit-time technology allows for measurement of virtually any liquid, even those with high levels of aeration or suspended solids
- Large graphical display with intuitive navigation, multiple setup wizards and patented pipe configuration menu
- SensorFlash® microSD card stores all operational data for easy device transfer and servicing
- Suitable for multiple sectors requiring budget-conscious liquid flow instrumentation, including water and wastewater, power, HVAC, and chemical industries



SITRANS FP differential pressure flow measurement

The SITRANS FP product line offers a complete solution for differential pressure flow measurements. SITRANS FP330 as well as the SITRANS FPS230 both are suitable for a vast range of different applications under various process conditions and parameters



SITRANS FPS230/FP330

- Flexible mounting
- One pressure transmitter for all applications
- Single source supplier for the hole measuring point
- Pre-mounted flowmeter delivered in "one box"
- Easy traceability throughout the ordering process
- Direct technical feedback and possibility to order



Differential pressure flowmeters: SITRANS F O

- Universal flow measurement for liquids, gases, and vapors
- Always provide accurate results even with large bores, high temperature and extreme pressure





SITRANS FX330

- Accurate measurement of steam, gas, and both conductive and non-conductive liquids
- Available in sizes DN 15 to DN 300 mm
- Integrated pressure and temperature compensation for lower installation costs and increased accuracy
- Integrated reduction of nominal diameter results in a large turndown ratio, reducing installation costs and potential for leakage
- Provides redundant storage of all calibration and configuration data within the display memory and the electronics module
- Designed from the ground up to be fully compliant with the IEC 61508 SIL 2 safety standard
- Cost-efficient energy calculation including net heat measurement
- Remote version available with cable length up to 50 m





Always on the level

Indispensable in numerous applications in the process industries:
Whether point level detection or continuous level measurement,
our comprehensive offering has the right solution for your application.



SITRANS LR100 series – for hassle-free level measurement

- Compact 80 GHz radar transmitter for liquids and solids applications
- Featuring Bluetooth® wireless technology for easy and quick setup with Siemens SITRANS mobile IQ App
- Ideal for chemical storage vessels, bulk solids hoppers, produced water, and drilling mud





Continuous level measurement

Continuous level measurement constantly monitors dynamic processes. The measurements are transmitted as an analog signal or digital value. We offer a wide range of transmitters based on a variety of technologies, including ultrasonic, radar, guided wave radar, capacitance, gravimetric, and hydrostatic.

Process intelligence

The signal processing technologies differentiate between the true echo from the material and false echoes from obstructions or electrical noise. The sophisticated software is supported by field data gained from more than a million applications. This in-depth knowledge and experience is built into the software's advanced algorithms to provide intelligent processing of echo profiles. The result is a repeatable, fast, and reliable measurement.

Radar level measurement with intelligent signal processing

- Non-contacting and low-maintenance
- Microwaves require no carrier medium for precise measurements even under harsh process conditions
- High performance and easy implementation using just a few parameter entries



SITRANS LR560

The world's first 78 GHz level transmitter

- 2-wire, 78 GHz FMCW for ranges up to 100 m (328 ft)
- Very narrow 4-degree beam angle with 3" lens antenna
- Aiming flanges with purge, easy to install
- Process Intelligence integrated and plug and play performance



SITRANS LR250

- 2-wire, 25 GHz pulse radar level transmitter up to a range of 20 m
- For liquids and slurries in storage and process vessels with high temperatures and pressures
- Horns, FEA, HEA and PLA antenna options offer versatility on field applications



SITRANS LR200

- 2-wire, 6 GHz pulse radar level transmitter for liquids with a range of up to 20 m
- Ideal for process vessels with turbulence and heavy deposit, as well as with high temperatures and pressures with a range of up to 20 m





Ultrasonic level measurement

Our market-leading ultrasonic level measurement is an extremely cost-effective solution. The self-cleaning face makes it suitable for harsh environmental conditions. The non-contacting technology is used in numerous industries to monitor liquids, bulk solids, and slurries.



SITRANS Probe LU240

Cost-effective, compact, intelligent level solution for liquid chemical inventory, monitoring small process vessels, and level monitoring measurement in the environmental industry.



Level controllers

Our product portfolio of level controllers feature intuitive navigation via the local user interface and are ideal for applications in all industries. Whether you need the world's highest accuracy in your open channels, rugged wet well pump control, or dual point monitoring, Siemens ultrasonics has you covered.



Echomax transducers

- Fully encapsulated robust ultrasonic transducers for use with Siemens ultrasonic controllers
- Various approvals for use in hazardous applications
- Self-cleaning face for harsh applications with buildup



Continuous capacitance

Our unique inverse frequency shift approach to capacitance technology ensures accurate, reliable, and repeatable measurements, even in dusty, turbulent, and vaporous environments or in situations with product buildup. Because even a small level change creates a large change in frequency, our instruments provide better resolution and consistently outperform conventional devices. With special features such as Active-Shield technology, they protect the measurement from the effects of moisture, vapors, foam, temperature and pressure variations, and buildup. Together with the modular probe options available on various models, they offer practical solutions to a wide variety of continuous level and interface applications.



SITRANS LC300

- Ideal for standard and industrial applications in the chemicals, hydrocarbon processing, food and beverage, mining, aggregate, and cement industries





SITRANS LG series



Guided wave radar

SITRANS LG guided wave radar transmitter for a range of contact level and interface applications from general to harsh conditions and everything in between. Little to no configuration, you'll be operational in minutes, saving you time and money.

Extreme process conditions don't stand a chance, and these transmitters feature SIL options for applications requiring functional safety. Advanced diagnostics including trending, profiles, and event logging give you the data you need at every step of your process. Rapid response times and advanced echo processing deliver accurate and reliable readings over the full application range, even in small containers and in low dielectric constant material. And with field-replaceable and adjustable probes, if your process changes, your measurement device can, too.

SITRANS LG240



- For use in hygienic and corrosive applications

SITRANS LG250



- Highly flexible solution for liquid level and interface applications. Extremely versatile for many applications

SITRANS LG260



- Ideal for measuring the level in medium-range solids applications, including grains, plastics, and cement

SITRANS LG270



- Offers configuration options for extreme conditions, including high-temperature and high-pressure applications

All versions include:

- Automatic buildup adjustment
- Remote display and electronics options
- 2 mm accuracy
- Backlight with full graphic display, top- or side-mountable
- SIL 2/3 approval options
- Field-replaceable probes
- Quick setup wizards
- USB service port option



Hydrostatic

Low-cost level measurement for direct mounting or mounting with remote seals on tanks and vessels



SITRANS LH100 and SITRANS P DS III

- Suitable for a wide range of applications in the chemical and petrochemical industries
- Highly resistant to extreme chemical and mechanical loads as well as electromagnetic interference



Gravimetric

Gravimetric level measurement with SIWAREX weighing technology offers highly precise measurement without material contact independent of medium temperature, tank shape, built-in parts, or material characteristics.



SIWAREX WP321

- Technology module for the SIMATIC ET 200SP distributed I/O system
- For level measurements in silos and bunkers; convenient and seamless integration of platform scales directly into the automation environment



Point level detection

We offer you a comprehensive portfolio for extremely reliable and precise point level detection. Our wide selection includes ultrasonic, rotating, and vibrating level switches as well as RF capacitance switches with inverse frequency shift technology that are cost-effective and suitable for point level, interface detection, dry run, and safety back-up applications including bulk solids, liquids, and slurries.

Vibrating, rotary paddle

- Especially suitable for low bulk density applications
- Ideal for use in harsh and abrasive environments, thanks to their rugged design
- For detecting high, low, and demand levels in solids, liquids, and slurry applications
- A wide variety of configuration options makes them suitable for any environment
- Simple to use with no complicated setup or configuration
- Stainless steel, aluminum, and plastic enclosure options and high-grade steel process connections provide exceptional resistance to mechanical forces, a long service life, and low cost of ownership
- Options for SIL 2/redundant SIL 3



SITRANS LPS200

- Rotary paddle switch that detects solids with densities as low as 15 g/l
- Motor protection
- SIL 2 certification for best-in-class reliability and performance
- Options for fail-safe rotation monitoring and alarming



SITRANS LVL100 and LVL200

- Vibrating level switches for liquid and slurry applications, including high, low, and demand level alarms and pump protection
- Wide application range including high temperatures and pressures, hygienic versions, large variety of enclosure materials, SIL 2/redundant SIL 3 options and remote testing





SITRANS LVS100, LVS200 and LVS300

- Vibrating level switches that detect solids with densities as low as 5 g/l
- Best-in-class sensitivity detection
- Ability to handle and monitor buildup
- Options to detect solids interface within a liquid



Pointek ULS200 Ultrasonic

- Non-contacting ultrasonic level switch with two switch points
- Ideal for sticky materials and an effective solution for bulk solids, liquids, and slurries



Pointek CLS100

- Suitable for level detection in constricted spaces
- Sensguard protection of probe for harsh and abrasive environments and chemically resistive probe types available
- Compact 2-wire or 4-wire switch



Pointek CLS200 and CLS300

- Suitable for level detection in demanding conditions with high pressures and temperatures
- Suitable for aggressive applications including very high temperatures and pressures
- SIL 2 options
- Smart PROFIBUS versions with digital display
- Remote operation via PROFIBUS for status and function testing
- Remote detection of buildup and monitoring of other process condition changes





Always in pole position: SIPART Positioners

As the interface between control system and valves, positioners play an important role in ensuring reliability and optimal performance in process plants around the world. Our proven portfolio with the SIPART PS2 precisely controls the entire range of valves and masters even special tasks with absolute reliability. In addition, we have now introduced our new SIPART PS100 – to precisely meet your application requirements.



SIPART PS100 – easy to use, fast in commissioning and simply robust

- One-push initialization: fast commissioning at the push of a button
- Application parameter to select different modes of valve positioning, e.g., exact, fast, on-off, or booster
- Internal non-contacting sensor: non-wearing and vibration-resistant
- Non-corrosive sound absorber for use in harsh environments
- Plain-text display with status icons in accordance with NAMUR NE107 and four operation buttons





SIPART PS2 – the all-around positioner

The SIPART PS2 has grown to become the most widely used positioner for linear and part-turn actuators. It is constructed to meet a wide variety of requirements:

- Polycarbonate, aluminum, or stainless steel enclosure
- 316L stainless steel enclosure for nearshore, offshore as well as oil and gas applications in hazardous areas
- Ex d explosion-proof version
- Communication via PROFIBUS PA, FOUNDATION Fieldbus, or HART
- Integrated booster option for quick control of large drives
- Low operating costs thanks to minimal air consumption



SIPART PS2 – more functions, more possibilities

The SIPART PS2 comes with an extensive range of functions and diagnostic capabilities, which we improved even further:

- Optional pressure sensors: improved valve diagnostics and parameter monitoring
- Ready for digitalization: Fast and predictive determination of valve maintenance requirements using the valve monitoring app
- Regular partial stroke tests: ensured movement of emergency shutdown (ESD) valves and other open/close valves in the event of an emergency
- Fail in Place: the valve remains in its last position upon loss of electrical and/or pneumatic power
- Fail Safe: the valve moves to the safety position; also suitable for SIL2 applications
- Valve performance tests (VPT): immediate, on-site assessment of valve maintenance requirements



Positioner with remote control electronics

- Suitable for use in environmental conditions with high-energy radiation



Positioner with various external position transmitters

- Easier access to positioner for valves at not easily accessible locations





Early detection protects your process

Process protection devices can be used as early-warning systems to avoid costly interruptions and breakdowns of equipment. They detect flow problems, blockages, screen faults, machinery slowdowns, or burst filter bags. Their rugged construction makes them impervious to dust, dirt, buildup, and moisture.



SITRANS AS100 – acoustic sensor used for solids flow detection, featuring a compact, stainless steel construction for harsh environments and non-invasive mounting

- Detection of high-frequency acoustic emissions from friction or the impact of dust, powders, granulates, and other solids
- Signaling of flow/no flow or high/low flow
- Compatible with SITRANS CU02, which processes signals from the sensor
- Provision of relay and analog outputs for connection into a process, or direct connection to a PLC analog output





Acoustic sensors

Non-invasive acoustic sensors detect inaudible, high-frequency acoustic emissions generated by friction and impact, caused by materials in motion.



SITRANS DA400

- Acoustic analyzer for the condition monitoring of oscillating displacement pumps
- Simultaneous and continuous monitoring of up to four independent delivery valves
- Easy system operation and configuration either locally by LCD and keyboard or via PROFIBUS DP/PA



Motion sensors

Non-contacting motion sensors detect changes in motion and speed of conveying, reciprocating, and rotating machinery.



SITRANS WM300 MFA

- Motion failure alarm (MFA), differential speed detection (DSD), and non-contacting tachometer (NCT)
- Multiple alarming powered by 4 relays for overspeed or under-speed conditions from the sensors
- Intuitive programming thanks to a simple menu structure, along with an on-board display and push buttons



Milltronics MFA 4p

- Plant protection through the detection of absence of motion, as well as underspeed or overspeed conditions
- Probes usable in hazardous, high-temperature, and harsh conditions, thanks to their superior design
- With MSP or XPP probes



SITRANS WM100

- For detecting the absence or presence of motion of rotating, reciprocating, and conveying equipment
- Heavy-duty alarm switch



Process controllers

SIPART DR controllers are outstanding thanks to their extreme reliability and ease of use. Various software packages are available to make their handling easy and intuitive and to extend their scope of application. The standard version already offers comprehensive controller hardware that can be upgraded quickly and easily for specific applications by means of a large number of optional input and output modules. Plug-in modules for communications over RS 232/RS 485 or PROFIBUS DP are also available.



Process recorders

SIREC D200, 300, and 400 display recorders are used for continuous monitoring of process quantities, plant maintenance, process optimization, or troubleshooting. Our complete range of process recorders offers state-of-the-art solutions for the most demanding requirements.





Expand as you go

Integrated communication down to the field level is becoming an increasingly important factor for the success of our customers. Availability of the instruments in automation solutions at all times is necessary to gather information about the state of the plant from existing data, and to derive the correct maintenance measures with regard to time and scope. This is not a problem with our modern solutions. Even proven plants that have been running for many years can be expanded with a small investment in such a way that the most important data is available – not only locally, but with secure worldwide access if required.



SIMATIC 3010C/RTU3030C – The compact remote terminal units monitor remote measuring points, even in locations where no power supply exists.

- Easy configuration using a web browser instead of programming
- Flexible power supply from batteries, solar energy, or 24 V DC
- Energy-optimized operation and integrated energy management for connected analog and digital sensors
- Secure communication (TeleControl Basic protocol, SINAUT ST7, DNP3, and IEC 60870-5-104) via the integrated UMTS modem (RTU3030C) or via LAN port (RTU3010C) in addition to a SCALANCE S or SCALANCE M
- Extended temperature range from -40°C to $+70^{\circ}\text{C}$ as well as an optional enclosure meeting the IP68 standard





SITRANS RD150

- Remote display for 4 to 20 mA and HART devices
- Easy-to-use basic configuration of HART instruments using HART commands
- Ease of use through the backlit 4-button menu-driven display and flexible mounting options



Remote digital display

The universal remote digital displays allow remote display of and access to measurement data from a convenient location. Our advanced range of remote displays include options for pump control with communications including HART and Modbus RTU with flexible output options.



SITRANS RD100

- Loop-powered display
- Suitable for level, flow, pressure, temperature, and weighing applications
- Can be used in a large variety of environments (low/high temperatures, hazardous areas)
- Simple setup and installation



SITRANS RD200 and RD300

- Universal and full-featured versions
- Ideal for flow rate, total, and control applications as well as for use with most field devices
- Data logged and displayed on the PC with the free RD software
- Sunlight-readable display
- Standard serial communications output (Modbus RTU)
- Pump alternation control, linearization and square root and math functions



WirelessHART components

WirelessHART enables the integration of measuring points that could not be implemented before due to the operating environment or for economic reasons. In addition to the SITRANS TF280 transmitters for temperature measurement and SITRANS P280 for pressure measurement, the SITRANS AW210 and SITRANS AW200 WirelessHART adapters integrate instruments with HART capability as well as analog devices that do not support HART communication. Access to diagnostic data can be implemented with these adapters at low costs in most cases, especially when the control system does not support integrated HART communication.



SITRANS AW200

- Connection option of up to four HART devices in multi-drop mode
- Support of 4–20 mA devices without HART
- Power supply of the connected field device via an integrated battery

IE/PB Link PN IO

- Can constitute the gateway between PROFINET and PROFIBUS
- From the IO-controller viewpoint, all DP slaves are treated like IO devices with a PROFINET interface
- Use as a data records router for the parameter assignment of field devices via SIMATIC PDM (Process Device Manager) in all plants with PROFIBUS DP





How to meet all your weighing and dosing requirements

Weighing and dosing processes are of great significance in many areas of industrial production. Whether for filling food and beverage containers or preparing recipes for chemicals and pharmaceutical products: With our solutions, you can count on absolute reliability and highest precision.







Available for all requirements

The flexible design of our products makes it possible to implement weighing solutions from simple platform scales and gravimetric level measurement up to highly complex automatic scales with minimal conversion costs. Using SIWAREX load cells and electronic modules for weighing systems together with Siemens Milltronics belt scales and SITRANS weigh feeders and solids flowmeters, you can design an optimal system for practically every task.



SIWAREX WP351 – the ultra-compact weighing electronic for maximum precision

- Ultra-compact: 20 mm wide, 65 mm high
- Precise: Resolution $\pm 20,000,000$ increments
- Seamlessly integrated in ET 200SP system, works with S7-300, 400, 1200 and 1500 controllers
- Fast: 1,000 Hz sampling rate, digital output response time < 1 ms
- Intelligent firmware enables the weighing process to be controlled and optimized entirely from the weighing module





End-to-end automation

Whether central or distributed: our electronic weighing systems set standards. We offer integrated solutions for seamless integration into the SIMATIC automation system under the name SIWAREX. The weighing system can be easily adapted to meet your individual requirements with the SIMATIC standard components. Moreover, standardized interfaces, integrated functions, and uniform tools allow for cost-effective configuration. Whatever your choice, you can count on a high degree of precision with SIWAREX and benefit from certifications according to OIML as well as a finely graded range of functions.



SIWAREX WP231

- Weighing module for level monitoring of silos and bunkers, use in platform scales as well as for weighing in hazardous areas
- Can be fully integrated into SIMATIC S7-1200 and therefore also programmed in the TIA Portal
- Can be operated without SIMATIC CPU
- Certified according to OIML R-76 – legal for trade as NAWI



SIWAREX WP241

- Electronic weighing system especially designed for belt scale applications
- Simulation mode allows for a full function test even without a connected belt scale
- Full integration into SIMATIC S7-1200 and TIA Portal, stand-alone operation without SIMATIC CPU is possible
- Factory-provided interfaces such as Modbus TCP/IP and Modbus RTU as well as digital and analog interfaces



SIWAREX WP251

- Electronic weighing system for completely independent control of dosing and filling tasks
- Trace function: All saved process values and corresponding states can be displayed, analyzed, and, if required, edited in spreadsheet programs with SIWATOOL V7
- Full integration into SIMATIC S7-1200 and TIA Portal, stand-alone operation without SIMATIC CPU is possible
- Factory-provided interfaces such as Modbus TCP/IP and Modbus RTU as well as digital and analog interfaces
- Certified according to OIML R-51, R-61, R-76, and R-107 – legal for trade as NAWI, AGFI, ACI, DTI



SIWAREX WP321

- For level measurements in silos and bunkers; convenient and seamless integration of platform scales directly into the automation environment
- Up to 600 Hz sample rate
- Technology module for the SIMATIC ET 200SP distributed I/O system
- Easy commissioning by HMI or by SIWATOOL (no prior knowledge of SIMATIC required)
- The ready-to-use sample application enables fast development and implementation of customer- and industry-specific solutions
- Seamless integration into PCS 7 via dedicated add-on package



SIWAREX WP521 ST/WP522 ST

- Optimal for use in platform scales as well as for level monitoring of silos and bunkers and in hazardous areas
- Technology module for the SIMATIC S7-1500 Advanced Controller family
- Two versions: the single-channel design SIWAREX WP521 ST for one-scale systems, and the SIWAREX WP522 ST two-channel design for two-scale systems





Load cells

The field-proven SIWAREX WL200 load cells are the perfect choice for reliable weight measurements. A wide range of designs, capacities, and certificates guarantee a perfect fit for all requirements.

SIWAREX WL200 load cells

- Suitable for operation in hazardous areas
- Large measuring range from 0.3 kg to 500 t
- Hermetically sealed for maximum service life
- Options with redundant design and for high temperature ranges are available
- Smart-design fastening parts for simple and safe installation
- High degrees of protection (IP)
- Certified in accordance with OIML R-60



Digital junction box



SIWAREX DB

- Simplification of service via remote diagnostics for individual load cell
- Connection to SIMATIC automation system via SIWAREX WP weighing electronics
- Comprehensive monitoring of the weighing process down to the single load cells
- Access to specific error states such as wire break, overload etc.
- Connection of up to four standard strain gauge load cells per scale
- Digitalization of proven strain gauge technology
- Rugged due to IP66
- Retrofit of existing plants easily possible by exchanging analog junction box against SIWAREX DB



Weighing terminals



SIWAREX WT231



- Combination of powerful SIWAREX WP231 weighing electronics and Touch Panel with application-specific user interface in one product
- Stand-alone solution independent of automation solution and therefore ready to use
- All settings and parameters for applications in the areas of level measurement and platform weighing machines can be made via the Touch Panel
- Comprehensive diagnostics options, such as checking the weight course and monitoring and reporting limits
- Diverse factory-provided interfaces such as Modbus TCP/IP and Modbus RTU as well as digital and analog interfaces

SIWAREX WT241



- Combination of flexible, high-resolution belt scale weighing module and Touch Panel with application-specific user interface
- Stand-alone solution independent of automation system and therefore ready to use
- Simulation mode allows for complete application test – even without a connected belt scale or speed sensor
- Flexible parameterization of digital inputs and outputs for a wide range of functions
- Diverse factory-provided interfaces such as Modbus TCP/IP and Modbus RTU as well as digital and analog interfaces



- SIWAREX FTC is a SIMATIC based integrator for belt scales and solids flowmeter with high functionality, fully integrated into SIMATIC and PCS 7 by S7-300 or ET 200M. Programming and visualization can be done by existing HMIs of the PLC or by Notebook
- SIWAREX WP241 is a SIMATIC S7-1200 based integrator with high functionality for belt scales, fully integrated into PLC. Programming and visualization can be done by existing HMIs of the PLC or by Notebook



Weighfeeders

- Highest weighing accuracy ensures optimization of mixing, process sequences, and balance calculations
- Reliable and continuous performance
- Virtually maintenance-free
- Various designs engineered to customer requirements



Integrators for dynamic weighing systems

Our electronic transmitters process the sensor signals into operating data for continuous in-line weighing and material flow measurements.

BW500/L and SIWAREX WT241 offer economical and basic operation for belt scales, including display of flow rate, load, speed, and totalized material for belt scales and weighfeeders. Easy and comfortable operating and programming can be performed by the integrated keypad

- BW500 and SF500 (for solids flowmeter) are advanced integrators with additional control functions such as PID or batch controllers. BW500 also offers legal-for-trade options for belt scales like MID or NTEP



Belt scales

Milltronics MSI is an extremely robust, single-idler precision belt scale that provides continuous weighing of a variety of products in both the primary and secondary industries.

- Milltronics belt scales weigh raw materials, check inventories and monitor production processes
- Market-leading performance under harsh conditions
- Easy installation and low maintenance overhead (no moving parts)
- Repeatable accuracy in productive operation, as well as minimal hysteresis and maximum linearity independent of horizontal forces thanks to unique parallelogram design of the load cells
- Integrated overload protection for the load cells
- More approvals than any other belt scale in the world



Solids flowmeters


- Dust-tight inline weighing
- For continuous measurement of the throughput of dry bulk materials, free-flowing powders, or granulates
- Also for critical functions such as batch loading processes and mixing processes





For efficient gas composition analysis

Innovative analysis technology. Customized system design. Sound knowledge of customer applications. As a leading supplier of process analyzers and process analysis systems, we offer our global customers the optimum solutions for their gas analysis.

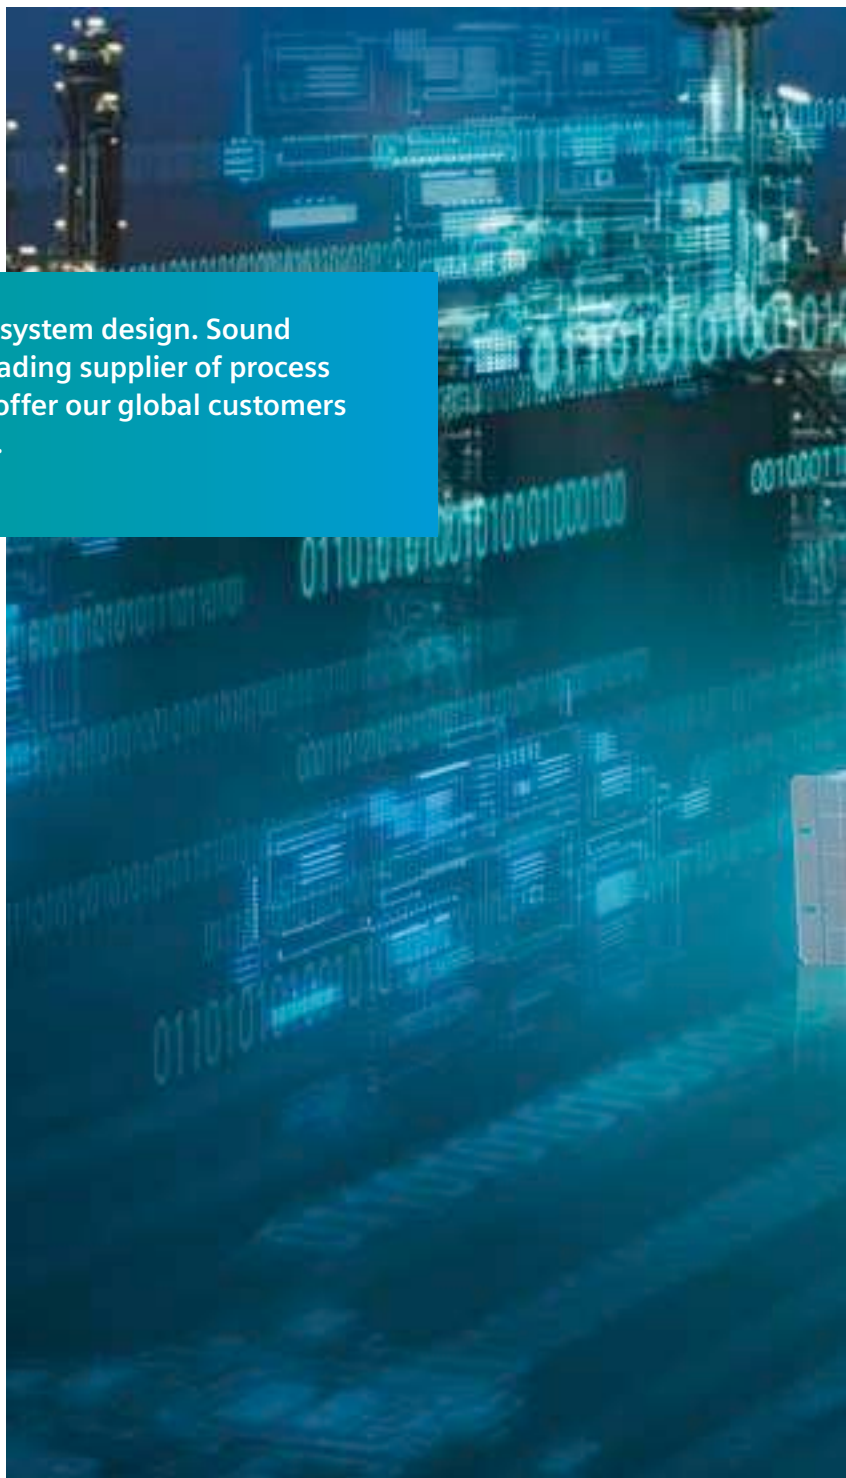





Processes under control

From flue gas monitoring in waste incineration and power plants to gas analysis in the chemical industry or the monitoring of rotary kilns in cement works – our high-precision, reliable analyzers get the job done.

Our comprehensive range of process analytic products meets all your requirements for complete measuring instrument solutions. Device operation is menu-driven and designed in accordance with NAMUR guidelines.



SIPROCESS GA700 – the new standard for flexibility in gas analytics. Depending on the measuring task, the SIPROCESS GA700 can be individually adapted to the respective requirements of the process by fitting selectable modules.

- A simple plug-and-measure operating concept
- Reliable measurement, optimized for numerous applications with internal correction of cross-interference
- An analyzer consisting of a basic device and one or two analyzer modules is ready for measurement
- The basic device can be operated in a 19" rack-mounted enclosure that is three units high or in a wall-mounted version
- The communication interfaces present in the basic units can be adapted to the respective process environment or process control system using optional interface adapters





The new SIPROCESS GA700 series for gas analysis lets you accommodate up to two modules in a single enclosure: either in a housing for wall mounting or in a 19" rack-mounted enclosure that is three units high.



Overview of wall- and rack-mounted enclosure options:

- The wall and rack enclosure with IP65 degree of protection has ATEX and IEC Ex approval
- With its Ex p degree of protection, the pressurized wall unit can be operated in combination with an approved purging unit in Zone 1 and Zone 2, with combustible and occasionally explosive samples or non-combustible sample gases
- With its Ex eC degree of protection, the wall unit can be operated in Zone 2 with sample gases whose concentration is below the lower explosive limit (LEL)
- The 19" rack-mounted enclosure with Ex eC degree of protection can be operated with a suitable outer housing in Zone 2 with combustible or non-combustible gases



SIPROCESS GA700

- Ex-field device for Zone 1 and Zone 2 applications (only OXYMAT 7)



SIPROCESS GA700 – ULTRAMAT 7

- For boiler control measurements in incineration plants or process gas measurements in chemical plants
- High measurement accuracy with complex gas mixtures based on a dual-beam NDIR method
- Integrated option for interfering gas correction
- Equipped with preventive maintenance function



SIPROCESS GA700 – OXYMAT 7

- For measurement of oxygen concentrations
- Measuring range 0–0.5% (smallest measuring range) or 0–100% (largest measuring range)
- Extremely high measuring accuracy based on a paramagnetic alternating pressure principle
- For ambient temperatures up to 50 °C



SIPROCESS GA700 – CALOMAT 7

- With thermal conductivity detector for quantitative determination of H₂ and He in binary or quasi-binary gas mixtures
- Measuring range 0–0.5% (smallest measuring range) or 0–100% (largest measuring range)





Process gas analysis – Extractive

Continuously, samples are extracted from the process line, prepared and supplied to the analyzer for close and precise monitoring of the process. This way, deviations are managed within seconds.



CALOMAT 6

- Suitable for installation in Ex Zone 1 or Ex Zone 2
- For all areas of gas purity measurement up to use in processes for controlling production methods
- Approved to Safety Integrity Level 1 (SIL 1)
- For measuring the concentration of gas components such as H_2 , Cl_2 , HCl , or NH_3 in binary or quasi-binary mixtures



CALOMAT 62

- Specifically designed to measure hydrogen and noble gases in corrosive environments, such as chlorine
- Uses the principle of thermal conductivity (TCD) and is designed specifically for measurements in corrosive gases, such as chlorine



FIDAMAT 6

- Measures total hydrocarbon concentration in the air or in gas mixtures with high boiling points
- Ideal solution for almost all measurement needs – from emission control to measurement of hydrocarbon traces in pure gas analysis to measurement of high hydrocarbon concentrations even in the presence of corrosive gases



OXYMAT 6/61

- Oxygen analyzer for standard applications
- Can be operated with ambient air as the reference gas that is passed to the analyzer unit by the built-in pump
- Approved to Safety Integrity Level 2 (SIL 2)



OXYMAT 64

- Special analyzer for measurement of trace oxygen in the ppm range
- For air-separation systems or technical gas production





ULTRAMAT 23

- For standard applications in various industries
- Benchmark for emission monitoring tasks
- Innovative multi-component gas analyzer with unique combination of UV and IR in one device
- For measuring UV-active and/or infrared-sensitive gases by means of the NDIR, as well as oxygen through the use of electrochemical or paramagnetic oxygen measuring cells
- Calibration with ambient air – no extra calibration gases needed
- Minimal maintenance efforts guarantee high availability



ULTRAMAT 6

- Can be used from emissions monitoring to process control, even with highly corrosive gases
- Analyzer in 19" rack design or field housing
- Measurement of up to four infrared-sensitive components in a single unit
- Approved to Safety Integrity Level 2 (SIL 2)



ULTRAMAT/OXYMAT 6

- Combines the features of the ULTRAMAT 6 and OXYMAT 6 in a 19" analyzer
- Extremely space-saving and compact design
- Approved to Safety Integrity Level 2 (SIL 2)



Ex versions

- Possible with an additional monitoring unit for CALOMAT, OXYMAT, and ULTRAMAT gas analyzers in field housings
- Measurement of non-flammable and flammable gases



SIPROCESS UV600

- Particularly suitable for measurement of very low concentrations of NO, NO₂, SO₂, or H₂S
- UV gas analyzer
- Measurement of up to three components simultaneously
- Simultaneous measurement of NO and NO₂ allows determination of the NO_x total concentration without need for additional devices such as NO₂ converters or CLD analyzers





Process gas analysis – In situ (TDLS)

In situ analytical procedures conduct physical measurements directly in the process gas line. In contrast to extractive gas analysis, a sample is not taken. Process data can be generated without contact and in real time.



SITRANS SL

- Reliable measurement of gas concentrations even with values in the zero range through patented technology
- Diode laser gas analyzer for measurement of flue and process gas concentrations, including in hazardous areas
- Operation directly at sensor with built-in local user interface (LUI)
- Integrated reference cells facilitate “laser locking” completely independent of the process gas concentration, resulting in extremely stable operation, negligible drift, and long maintenance intervals
- Ideal for oxygen measurements in harsh environments
- Suitable for use in SIL 1 safety systems according to IEC 61508/IEC 61511





In situ analytical procedures feature physical measurements within the flow of process gas directly in the actual process gas line. This means gases can also be measured under extreme conditions. Gas measurements with diode lasers are characterized by exceptional selectivity and flexibility. Neither high process temperatures nor high and varying concentrations of particles in the gas influence the quality of the results.



LDS 6


- Combines the compact, maintenance-friendly design, simple operation, and network capability of the six series analyzers with the proven, exceptional performance of in situ gas analysis using tunable diode laser spectrometers (TDLS) and fiber optics
- Precise, reliable measurement of gases even under extreme conditions, e.g. up to 600°C or with very high dust concentrations
- Measurement of NH_3 , HCl , HF , H_2O , CO , or CO_2 in flue gas, e.g. before and after gas purification
- Applications in cement and paper plants





Efficiency meets unsurpassed performance

The application of Siemens' MAXUM gas chromatographs provides the user with a number of benefits resulting from our innovative technologies combined with years of experience in the field of process gas chromatography. The flexibility of our products enables us to custom engineer the perfect solution for any application. The powerful and efficient chromatographs solve a wide variety of measuring tasks in various sectors including the chemicals, petrochemicals, refining, natural gas, gas processing, and LNG industries.

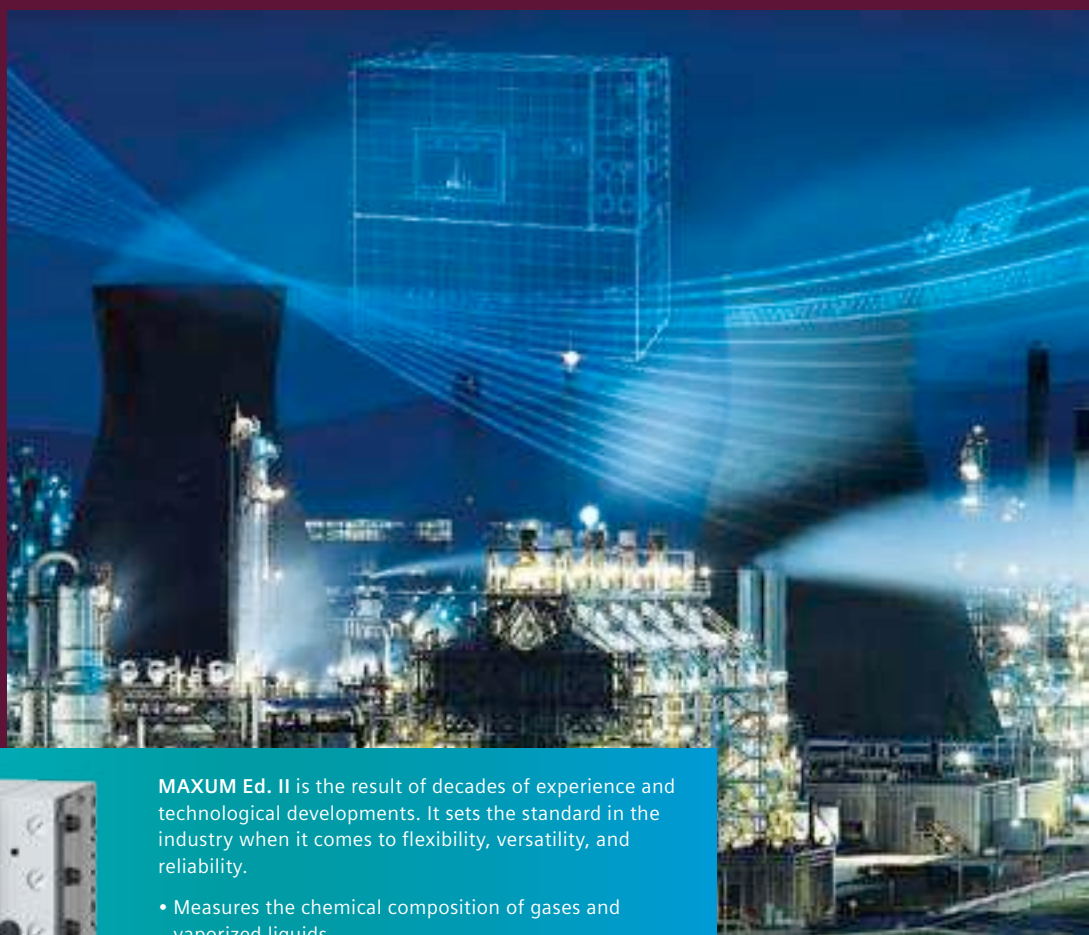

MAXUM Ed. II is the result of decades of experience and technological developments. It sets the standard in the industry when it comes to flexibility, versatility, and reliability.

- Measures the chemical composition of gases and vaporized liquids
- Meets the requirements for reliable on-line measurement in harsh process environments





MAXUM Ed. II

Our highly adaptable MAXUM Ed. II process gas chromatographs are the perfect match for a wide variety of process analytics applications, even with varying user requirements for each analyzer.

- Extremely rugged with specially designed hardware and software, simultaneous applications, parallel chromatography, and reduced analysis times
- Valveless column switching
- Smart Sampling System Interface (SSSI)
- New thermal conductivity detector for MAXUM airbath/airless GC
- With MAXUM Ed. II modular ovens, parallel chromatography simplifies even the most complex analytical systems and significantly reduces measuring times
- The modular design enables fast maintenance and higher analyzer availability during measurement and process optimization
- Open network with TCP/IP and Ethernet for communication with PC workstations, other chromatographs, or a process control system





Analytical application sets trend toward standardization

The same application is required time and again in different branches of industry. To minimize effort, we have developed standardized system solutions for industry-specific applications. These complement the range of individual system solutions. Ready-to-use systems also help minimize the technical risk for customers.



Set CEM CERT

- Reliable, continuous emission measurement of the components CO, NO, NO₂, SO₂, CO₂, and O₂
- Modular analysis system for cold-extractive measuring tasks
- Simple operation and calibration by means of an operator panel integrated in the cabinet door
- The innovative CEMS is tested and certified in accordance with EN 15267 and EN 14181 and is suitable for IED 2010/75/EU applications
- Up to three analyzers possible, based on IR, UV, paramagnetic, and electrochemical sensors





Set CEM 1

- Efficient emission measuring system for continuous measurement of CO, NO, NO₂, N₂O, SO₂, CO₂, O₂, HCl, HF, NH₃, and H₂O
- The proven ULTRAMAT 23 and LDS 6 analyzers are at the core of the system
- Attractive price-performance ratio
- High degree of flexibility through system integration of all ULTRAMAT 23 module versions



Set BGA

- The BGA Set is based on the four-component ULTRAMAT 23 gas analyzer with selectable equipment and I/O components
- Safe monitoring and measurement of the major biogas components CH₄ and CO₂, and critical associated components O₂ and H₂S
- TÜV-tested design with high safety standard
- Modular sample preparation for interfacing of multiple measuring points can be configured
- Very rugged and durable industrial design



Set GGA

- The GGA Set is a complete solution for monitoring hydrogen-cooled turbo generators
- Easy handling based on two redundant analyzers
- Cost-efficient solution that is safe to operate and has low initial investment costs
- High-precision and reliable purity monitoring of hydrogen with the CALOMAT 6 analyzer
- Measurement of CO₂ and argon as an inert gas is possible





How key industries benefit from single-source analyzers

Siemens offers a complete service package as well as all measuring instruments to assist you in engineering, designing, supplying, installing, and commissioning measurement solutions for complete industrial plants. Our “one-stop shop” concept supports selection of all process instrumentation and analytics all the way to integration with your process control system. Additional industrial components and systems are easily incorporated into the overall plant and ensure smooth process flows. In addition, user-friendly documentation of the plant ensures seamless after-sales service.



Individual solution concepts – Continuous planning from the sampling point, including sample preparation, up to the complete analysis system in a cabinet or large shelter.



Overview of our services portfolio


- Service experts consult you during the entire lifecycle, starting with the selection of the right analyzer to emerging operational challenges
- Commissioning and start-up in the field by contracts specialists all around the world
- Service contracts tailored to your individual needs
- Comprehensive training courses in our worldwide training centers or on site
- Provision services of rental equipment
- On-call services to ensure fast support through experts in case of need
- Siemens AP offers customers extended warranties services for up to 5 years
- Remote services with pro-active checks and rapid reactive assistance through remote access
- Fast, dependable, worldwide supply of spare parts ensures optimal availability



Increasing performance with Analyzer System Manager (ASM)

In the present time, it is more and more important to have accurate data and use them for further optimization of the plant. The Analyzer System Manager (ASM) offers comprehensive data collection, validation functions, maintenance planning and reporting functions, which enables enhanced data analytics.

Benefit from the Analyzer System Manager through an optimized performance, reduced maintenance costs and higher data quality.

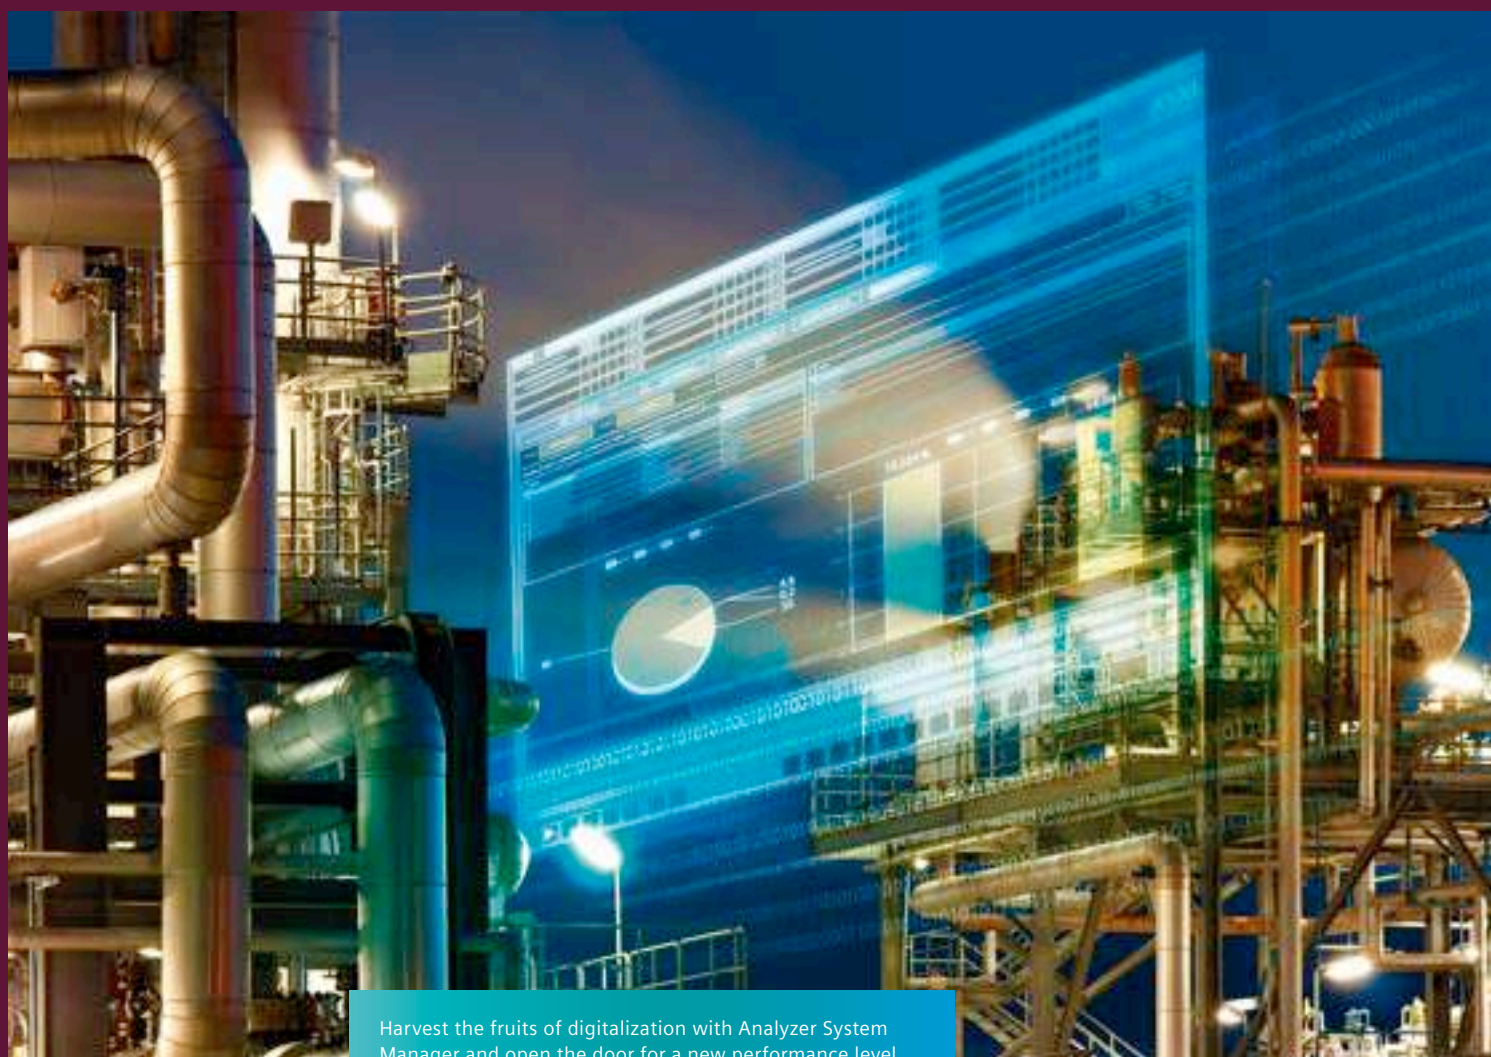

Harvest the fruits of digitalization with Analyzer System Manager and open the door for a new performance level of your analyzer measurement systems.



Data Acquisition and Handling System for monitoring and optimization of analyzer measurement systems supporting maintenance management and providing reporting of performance and service KPI and other relevant analyzer information


Key features

- Collection of important analyzer performance data over a variety of communication interfaces and storage in a central database
- Validation/Calibration of analyzers through centralized system
- Monitoring of analyzer measurement system data including sample preparation according to ASTM rules and deviations
- Maintenance Planning and Documentation
- Gas Bottle Management
- Comprehensive reporting module is available for evaluation documentation and further analysis
- State-of-the-art network solutions in a client-server architecture support even complex plant structures with distributed workstations
- Broad range of analyzers including 3rd party devices are supported through ASM



Digitalize your process

From design and commissioning to operations and performance monitoring – Siemens provides the software, tools, and services for the digitalization of every phase of a plant's lifecycle. End-to-end digitalization from a single source optimizes plant operations to reduce downtime and maximize cost efficiency.

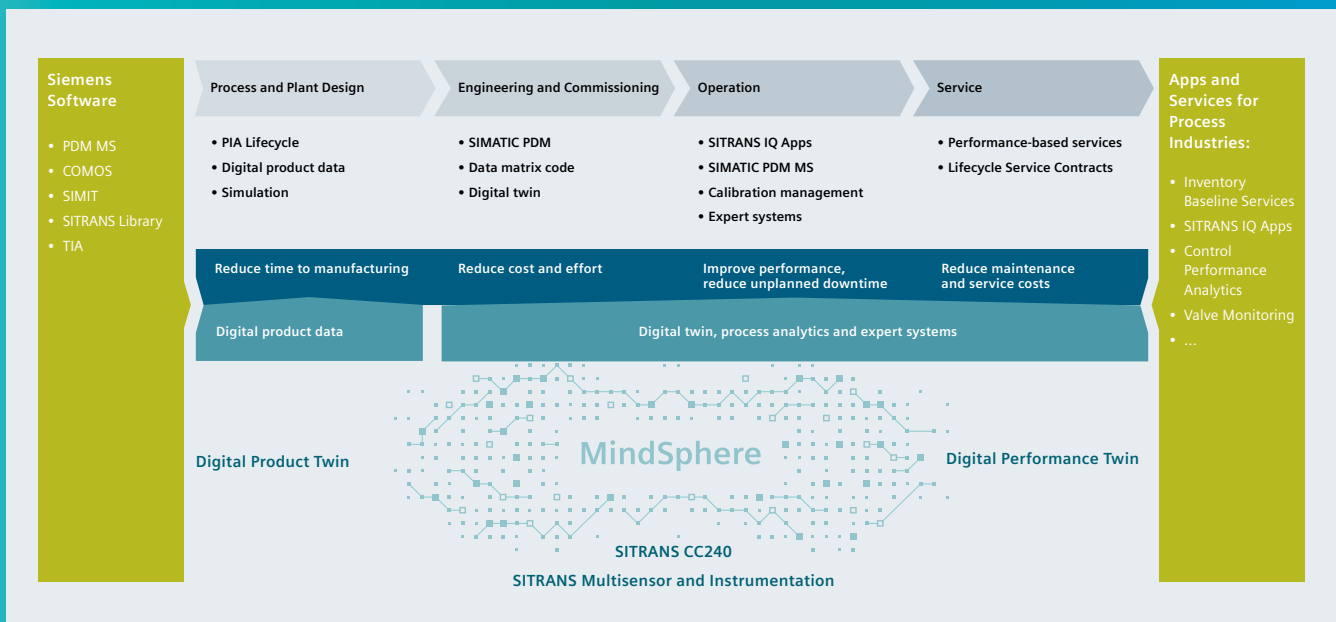

Siemens supports your digitalization over the entire lifecycle

During each of the main steps of the lifecycle of a plant, Siemens supports you with a set of software tools, apps, and services in order to improve the uptime and performance of your plant while reducing your maintenance and service costs.

Process and plant design

In order to support you while designing the plant, Siemens Instrumentation provides you with ample information via its PIA Portal (www.pia-portal.automation.siemens.com). When using engineering tools like COMOS, all digital product data can be imported directly. And if you are using SIMIT to train your staff, the process instrumentation is certainly included with simulation objects.



Engineering

When using state-of-the-art process automation like PCS 7, engineering is made easy with the SIMATIC PCS 7 Industry Library and especially the SITRANS Library for Field Instruments. Here, the faceplates provide the full potential of the instrumentation.

Commissioning and operation

New plants usually have communication down to the field level with HART, PROFIBUS, or PROFINET, ensuring transparency of secondary data of the field devices. Stand-alone or integrated parameterization tools like SIMATIC PDM are able to access or forward this data for further processing in apps, with no disruption to plant operations. They allow an upload or download of parameter assignments during commissioning of field devices based on an always-synchronized, central database and known network topology.

Service

In the future, monitoring of plant assets via Siemens Apps, such as [SITRANS SAM IQ](#) – Smart Asset Management, will allow the plant operator to pinpoint service needs and to make plant maintenance more efficient, thus reducing costs and increasing uptime. In addition, many support services are available, such as QR codes on each PI device, which allow you to easily download the specific information of an instrument on site.

Contact our experts directly for assistance with data troubleshooting and other services.





Online support for customers with SIOS and the industry support app

Access to accurate information is a huge asset in the field. Siemens Industry Online Support (SIOS) provides up-to-date information about specific products quickly and easily. Available in the online portal or in the downloadable smartphone app for maximum convenience.



SIOS Portal

24 hrs a day, 365 days a year – this portal provides comprehensive information on the entire portfolio of Siemens for process and discrete industries. Find information on automation, communication, and process instrumentation under:

- Product support: handbooks, manuals, FAQ, product notes, certificates
- Services: the service portfolio
- Support request: help – just state your issue and we will contact you within 4 working hours
- My support: activate notifications according to your needs



Industry Support App


- Download and install the app on your smartphone
- Scan the QR code of any device in the field
- Access comprehensive information including device-specific information like handbooks, Manuals, FAQ, product notes
- Submit a support request and we will contact you within 4 working hours (even quicker with a premium service contact)





Integrated tools for engineering efficiency

Empower your data! Clever, integrated tools and solutions such as COMOS and SIMIT let you take control – and greatly increase the efficiency of processing and manufacturing plants.

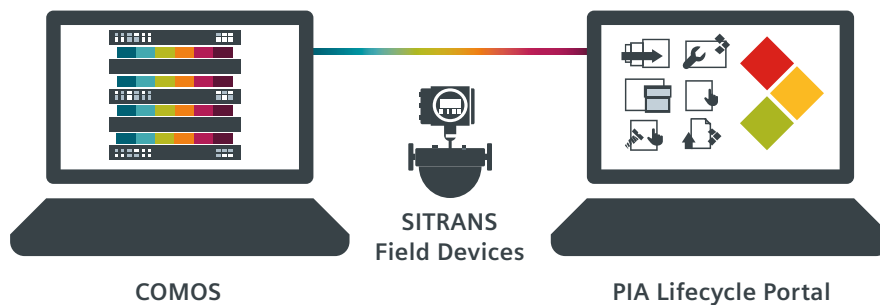

SIMIT

The simulation platform SIMIT enables comprehensive tests of automation applications and provides a realistic training environment for operators even before the real startup. This creates opportunities for process optimization and know-how retention which results in reduced commissioning time and significantly shortened time-to-market.

PIA Lifecycle Portal

This portal helps you select, size and configure your ideal piece of instrumentation.

Interfaces to COMOS and exports to the online ordering portal of Siemens: the Industry Mall (mall.industry.siemens.com)

You are able to track the lifecycle of your instrument, see warranty and extended exchange option information as well additional information such as factory certificates (e.g., for calibration or validation).

COMOS

COMOS is the engineering tool from Siemens for the entire lifecycle of your plant. With the direct integration of our PIA Lifecycle Portal we guarantee the seamless integration of our field devices in the engineering environment. We can offer field devices best suited to your processes, properties, and measuring requirements.

SITRANS Library

- Easy use of device-specific functions and data from devices of the SITRANS and SIPART product families, such as dosing or totalizer functions in solutions with SIMATIC PCS 7
- Library with device-specific function blocks, block symbols, and faceplates
- Fully compatible with SIMATIC PCS 7 Standard Advanced Process Library (APL) through the entire lifecycle, from engineering to running of the plant



SITRANS IQ

Our digital field device platform for performance, efficiency, and less downtime across the lifecycle

SITRANS field devices

The full portfolio of flow, temperature, pressure and level, as well as weighing and pneumatic valve positioners is well established in many industries. Reliable and accurate, they measure the primary measurement value and often provide secondary data which allows you to assess e.g. the status of a valve.

Multisensors will in future also detect additional non-cyclic information like vibration, temperature or magnetism, for example. Some instruments such as the MAG 8000 even send their data directly using mobile networks.

Connectivity down to the field devices is not given in the majority of the brownfield plants. Therefore connectivity elements will allow you to access the stranded data below to the classic, non-transparent I/O modules of older automation systems. SITRANS CC240 will in future allow to access these stranded HART data.

And last but not least, the Remote Terminal Unit RTU3041c will collect measurement data from highly distributed remote measurements and send it via encrypted e-mail to a SITRANS serve IQ – that forwards the collected measurement data into SCADA Systems or APPs.


SITRANS IQ Apps

Data connectivity via SIMATIC PDM Maintenance Station or SITRANS CC240 allows you to collect stranded data from the field. But deriving value from the data, recognizing patterns or even predict potential failures is a challenge.

With co-creating customers, Siemens is developing apps that support you in monitoring your plant. These apps provide life lists, inform you when devices have been changed. They visualize patterns, monitor limits (e.g. wear), and much more.

Digital Services


If the app detects an issue, an expert is easily available to support you. They are ready to remotely analyze the data together with your plant operators and service staff. And if requested, they are ready to support you with further services.

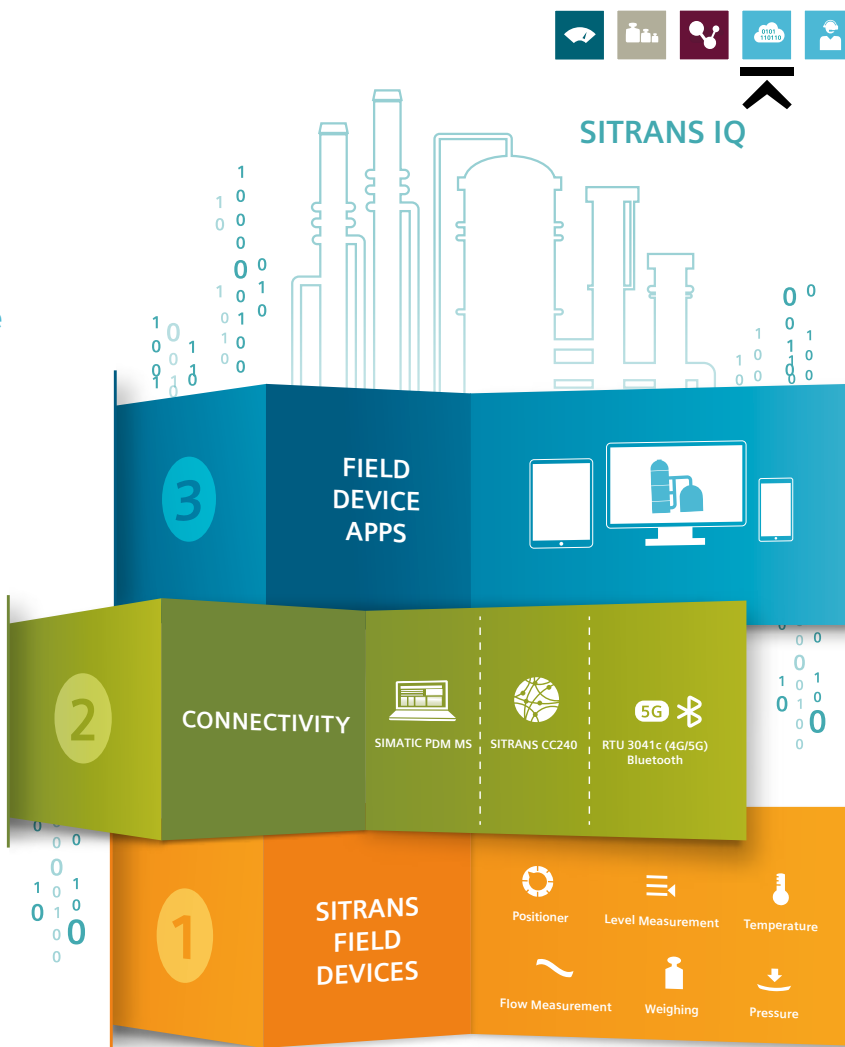



NAMUR Open Architecture will enable new business cases in MRO applications

The open architecture and second communication channel allow innovative solutions for new and existing plants to be implemented quickly while leaving the process control core unaffected.

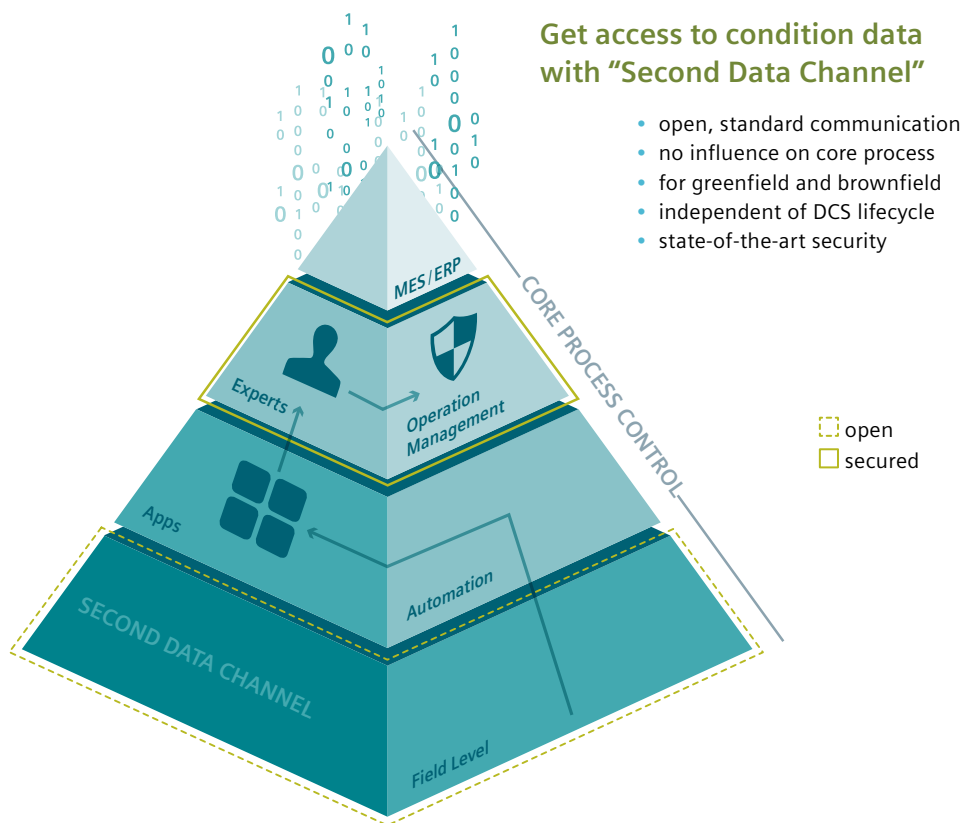

Multisensors as part of the monitoring and optimization

The multisensors measure indirect values such as vibration, and other. They usually monitor the state of selected assets and are outside the core automation pyramid. By recognizing deviations of the machines, valves, and the plant itself in daily operation, multisensors are able to predict potential failures or necessary maintenance of the plant in time. This leads to better planning of the maintenance process and a reduction in unplanned shutdowns.

Information model and security

It is absolutely essential, while collecting data from the plant, that the automation and process control remain untouched. The security must be incorporated by design. Likewise, any insights and possible optimization measures are reviewed by experts and the plant operator, before being fed back into the automation – it is always the plant operator who is in control.

Process instrumentation as part of core process control

The instrumentation is the source of all information to run your plant efficiently and safely. Instruments are your eyes and ears in the plant. To bring this information to the automation systems, PI runs on many different communication standards, from very cost-effective 4-to-20mA-only devices, to HART communication, PROFIBUS and in future also PROFINET devices.

Process instrumentation as part of monitoring and optimization

The core process instrumentation measures the critical values to run your application like e.g. flow, temperature, pressure, level. But also their secondary KPIs contain valuable information on e.g. the degradation of valves or temperatures of the transmitter electronics.

Apps

Siemens is developing its apps within the framework of Digitalization Enterprise Labs, ensuring a consistent framework of state-of-the-art functionality for all Siemens apps.

As our automation works seamlessly with all instrumentation available on the market, apps like Valve Monitoring and SITRANS SAM IQ – Smart Asset Management cover your entire installed base (though we would prefer, you would choose Siemens in the first place).



Our services support you

To thrive in today's competitive markets, industrial companies must extract maximum value from their assets. Our extensive range of services provide customers with the tools and knowledge they need to minimize lifecycle costs while increasing performance. Thanks to our dedicated service people all around the world, we can deliver the services you need tailored to the individual challenges of your industry.




The Industry Services portfolio includes corrective, preventive, predictive services – as well as Digital Industry Services – through the entire lifecycle of products, machines, and plants. Whether making system states transparent or reliably monitoring machines and plants while also protecting them with security concepts, Siemens Industry Services enables your machines and plants to perform at their best.



Industry Services for process instrumentation

In the process industries, communication with field devices is key to managing costs while ensuring safety, security, and quality. The comprehensive and modular range of Industry Services for Process Instrumentation from Siemens provides valuable tools for optimizing operations and protecting the long-term viability of your plant.

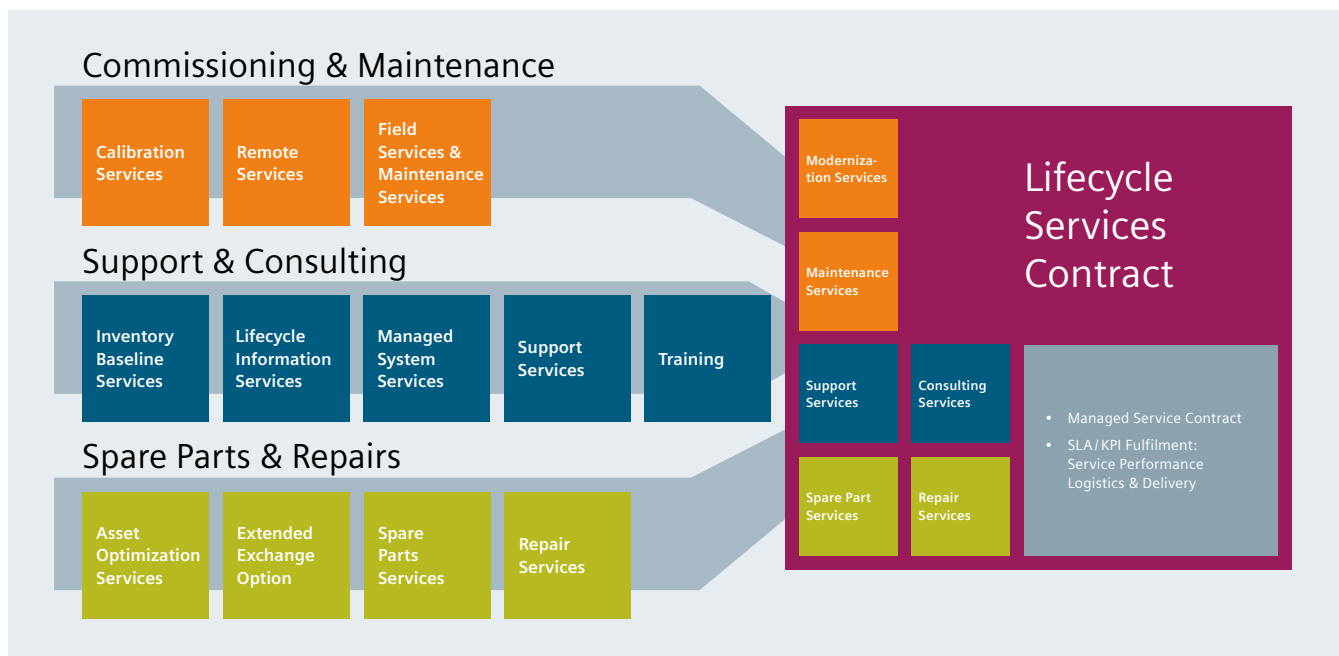

Commissioning and maintenance

Commissioning and maintaining field instruments is time-consuming, labor-intensive, and – depending on whether it's performed inside or outside explosion-risk zones – involves a substantial outlay. In addition, the ever-growing demands for IT security play an increasingly important role. Our range of on-site services, platform-based remote services, and comprehensive calibration services support you in all your activities, from engineering and commissioning to maintenance.

Support and consulting

Siemens' Inventory Baseline Services and Lifecycle Information Services provide convenient and powerful portfolio elements for your installed base. We offer a comprehensive training program for design, operation and maintenance personnel that can take place either at the Siemens Training Center or on your premises. Managed System Services are focused on the efficient, centrally coordinated processing of complex support requests. They not only make all service and support activities transparent, they also significantly reduce service time.

Spare parts and repairs

Asset Optimization Services take a structured, systematic approach to the comprehensive optimization of your supply of spare parts. With the Extended Exchange Option, you can protect any Siemens process instrumentation products you order from unforeseeable repair costs.

Lifecycle services contracts

A modular lifecycle services contract is composed of defined service elements and contract-specific parameters. Long-term investment protection and the assurance of serviceability are the essential benefits of a contract solution.



Remotely assisted by experts – in real time and wherever you are

Our Remote Services for Process Instrumentation ensure optimal reactive support for all the field devices used. Remote access is via Siemens' own IT infrastructure (cRSP = common Remote Service Platform). Our offering guarantees smooth commissioning, rapid troubleshooting, and comprehensive consulting related to your field devices, control loops, and plant.



Maintenance

- Maintenance is generally covered by inspection and maintenance services according to DIN 31051:
 - such as inspecting the field instrument's condition for a transparent view of the system status and implementation of preventive measures

Parameterization

- SIMATIC Process Device Manager
- Professional software for parameter assignment, visualization, or error tracing for every kind of instrumentation – either from Siemens or any other supplier
- The same usability – no matter whether you access the device on site or remotely from the engineering station
- In use worldwide for more than a decade

Commissioning

- Service Tablet PC SIPIX SD
- Siemens common Remote Service Platform (cRSP)
- High-performance industry tablet PCs
- Designed for use in harsh industrial environments
- ATEX approval for Zone 1 and Zone 2
- Configured with all necessary service applications, for Siemens and all common foreign devices
- Access via HART Bluetooth Modem or HART USB cable
- A graduated security and access concept, secure and monitored communication
- Absence of feedback effects thanks to the separation of the different networks (DMZ). Compatibility with general industrial security concepts, certification under ISO 27001 / CERT


Your benefit

- Reliable access to your process instrumentation
- Safe access either at the device directly or from the first remote I/O
- Fast and worldwide availability of expert know-how directly from the product manufacturer
- Technical assistance also during the configuration, commissioning, and maintenance phases



Approved and certified partners – near you

Siemens partners stand for proven expertise and excellent customer support. The companies we accept as partners have proven their capabilities and been certified in accordance with rigorous standards. At the same time, we support our partners with the same criteria we apply to the training of our own employees.

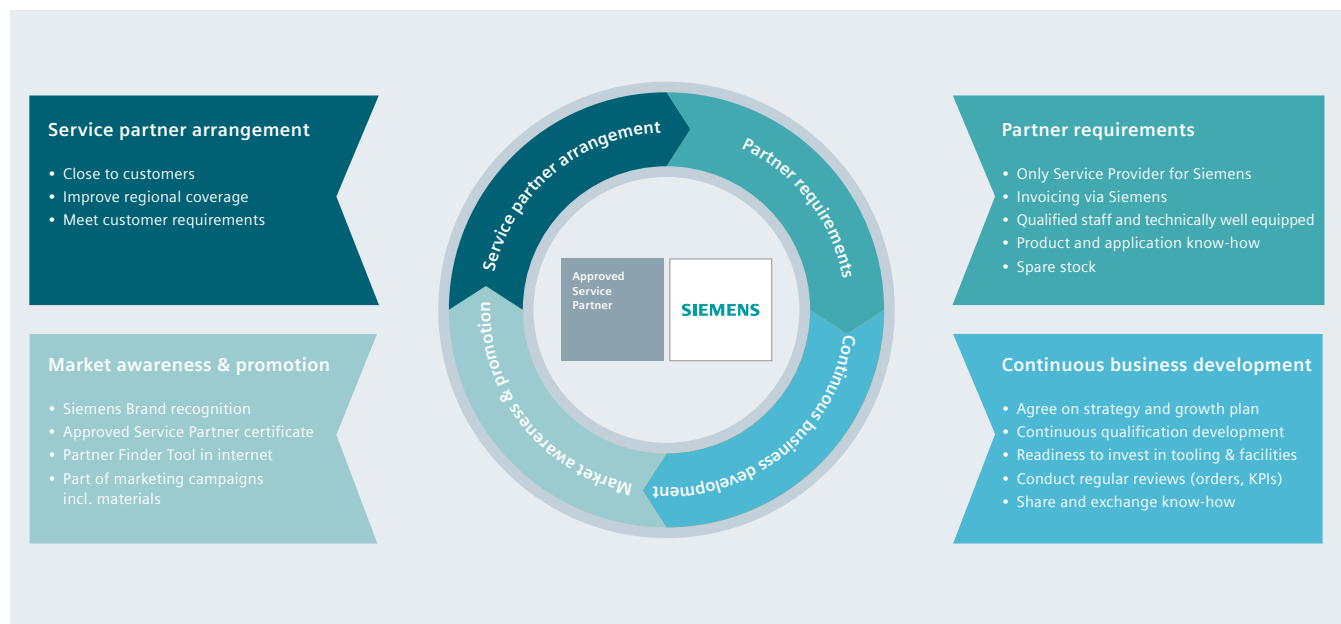

Role of partners

- Act as a competent service delivery on behalf of Siemens
- Regional on-site support
- Bring expertise and service capability
- Together with Siemens secure ongoing development of new service offerings
- Win new service customers

Siemens delivers quality

- Based on shared interest (Siemens and partner)
- Partners attend Siemens training programs on a regular basis
- Build on existing long-term relationships between Siemens and partners
- An extensive certification process ensures that Siemens requirements for competence profile and tooling are maintained

Your benefits

- Competent service delivery
- Close to customers (short reaction time)
- Fast access to critical spares (partner stock)
- Increased flexibility
- Partners typically enjoy a high degree of regional acceptance

**Published by
Siemens AG**

Digital Industries
Process Automation
Östliche Rheinbrückenstr. 50
76187 Karlsruhe, Germany

**For the U.S. published by
Siemens Industry Inc.**

100 Technology Drive
Alpharetta, GA 30005
United States

Article No.: DIPA-B10245-00-7600
Dispo 27900
WS 07210.0
Printed in Germany
© Siemens 2021

Subject to changes and errors. The information provided in this brochure contains descriptions or performance characteristics which, in case of actual use, do not always apply as described or which may change as a result of further development of the products. The desired performance characteristics are only binding if expressly agreed in the contract. Availability and technical specifications are subject to change without notice.

All product designations may be trademarks or product names of Siemens AG or supplier companies, the use of which by third parties for their own purposes may violate the rights of the owners.

